


POSITIONING MOUNT

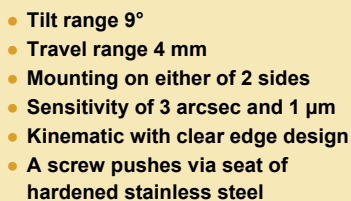

Mount has a resting flange to stop the holder. One fixing screw secures the optics against 2 contact lines, which make 2 contact points. To prevent damage to the holder, the tip of the fixing screw is made of plastic.

Platform of 840-0056-11 is preloaded by two strong coil springs, ensuring tight kinematic fit. A thick base of the mount adds stability. This allowed to eliminate part of the mount, keeping clear one edge. As standard, mount 840-0056-11 comes with the screws 870-0080.

Technical drawing of a 3D-printed part with the following dimensions and labels:

- 37.5
- 32.5
- 28
- 58
- 54 knob
- fixing screw
- 26
- 2 contact lines
- 16

RELATED PRODUCTS

Motorized
version
940-0060-01
See page 8.150



KINEMATIC POSITIONING MOUNT

